

YOU BIG FAKER.

One quick lap around a tree-shaded, fenced lawn landscaped with big rock and small plantings will show you, in unforgettable terms, that the Hustler FasTrak™ is a pro. This is no plastic, bantamweight garden tractor. The FasTrak has been designed and built for flat-out productive mowing on the straightaways, for manicured cuts in the tightest of turns.

Here's a mower that's now being used by professional landscape contractors in the most demanding of commercial applications. Here's a proven time-saver built to mowing-pro standards of durability and quality of finish. Expect year after year of dependable performance on front-yard grass that looks professionally cut week after week -- beautifully cut at a brisk seven miles per hour, up and down slopes, around and among obstacles, and all the while trimming razor-close to sidewalks,

trees, birdbaths, and flower beds — much, much closer than any front-steer tractor should ever attempt.

Choose major power from 16, 18, or 20-hp Honda or 18 or 20 -hp Kohler engines, driving 44" or 52" side-discharge decks punching up optional mulching kits and side-mount catchers. The frame, deck, spindles, and caster wheels are the toughest in the estate-class industry, so tough in fact that Hustler offers a lifetime warranty on the leading edge of the welded-steel mowing deck and on the tractor frame.

All-day comfortable to operate, basic in its safety and serviceability, inexpensive and forgiving in its maintenance requirements, this mower is not what it seems.

The Hustler FasTrak just pretends to be a residential mower.



Optional catchers help the FasTrak maintain a professional-quality lawn.



The tough, productive snowblower clears a 48" path.

FasTrak™ 48/54 Specifications



	48" Deck Models			54" Deck Models	
Model	Kawasaki	Honda	Kohler	Kawasaki	Honda
Horsepower	19	18	19	21	20
Displacement	585 CC	614 CC	597 CC	675 CC	614 CC
No. of Cylinders	2	2	1	2	2
Max. Torque	36.6 ft lbs @ 2000 rpm	31.8 ft lbs @ 2500 rpm	36.0 ft lbs @ 2200 rpm	38.4 ft lbs @ 2400 rpm	32.5 ft lbs @ 2500 rpm
Models Available	19/48	18/48	19/48	21/54	20/54

Starter 12-volt (1.8 kw) (see engine manufacturer specs)
Ignition Electronic
Charging System 12-volt, 15-amp (see engine manufacturer specs)
Fuel Unleaded gasoline (see engine manufacturer specs)
Fuel Filter Replaceable, automotive-type
Cooling Air cooled, fly-wheel fan
Governor Mechanical

Traction Drive System
Type Dual hydrostatic, Commercial-duty Hydro-Gear ZT 2800. Hydraulic system operates on 20W50 motor oil.
Hydrostatic Drive V-belt drive from engine crankshaft
Ground Speed Infinitely variable: 0-8 mph (0-12.9 kph) forward, 0-5 mph (0-8 kph) reverse

Steering Twin-lever SmoothTrak™ steering provides independent control of each drive wheel. Speed, forward, reverse, brake, and turns are all controlled with hand-operated controls

Turning Radius True zero turning radius. Turns within its own length. Counter-rotating, independent drive wheels

Fuel System Capacity 10 US gal (37.85 l)

Brakes
Service: Hydrostatic dynamic braking
Parking: Internal transmission mechanical brake. When steering levers are placed in neutral position, integral park brakes are automatically engaged

Mower Drive Single V-belt drive from engine with electric clutch. Spring tension idler for extended belt life

Safety Features Operator presence system connected to deck and drive clutches. Stabilizer rollers at rear of tractor

Seat Molded, cool-grey vinyl seat with adjustable armrests. Fore and aft sliding

adjustment. Seat-pan suspension springs standard.
Construction Mainframe is 1.5 in x 1.5 in x .188 in (3.8 cm x 3.8 cm x .48 cm) square steel tubing. Front caster wheels mounted with roller bearings on each wheel. Front caster forks are .375 in (9.5 cm) steel

Deck Lift Foot-operated deck height adjustment. Pin for setting height, detent for transport position

Controls Hand-operated choke, throttle, ignition switch, electric mower clutch. Integrated parking brakes

Indicators Engine warning light
Cup Holder Two cup holders molded into the left side fuel tank. Accommodates nearly any cup size including Big Gulp™

Decks
 48" and 54" Side-Discharge Decks

Type Free-floating mower using three blades with center blade to the front. Mower is suspended at the corners. Includes 4 deck-mounted rollers to improve flotation in rolling and uneven terrain

Deck Lift Raise and lower deck from driver's seat with simple foot-operated deck height adjustment. Pin for setting height, transport position. Change cutting heights, hop curbs and trailer more easily

Construction .125 in (.317 cm) welded steel. Solid 1 in x .375 (2.55 cm x .95 cm) steel bars reinforce impact areas on trim edges. Commercial-style box-section reinforced front edge. Reinforcements welded onto spindle mount areas. Molded rubber discharge chute.

Cutting Heights Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in .25 in increments from 1.5 in to 4.5 in (3.81 cm to 11.43 cm)

Mowing Blades Heavy-duty, heat-treated, high-lift steel blades

Blade Drive V-belt drive to all three spindles. Spring tension idler pulleys

Spindles Aluminum casting with steel shafts and sealed ball bearings
Flotation Suspended mower floats on four spring-assisted chains. 4 anti-scalp wheels are standard

Accessories
Flex Forks™ Shock-absorbing front caster forks for a smooth ride and smoother cut
Mulch Kit Recycles clippings under deck allowing clippings to be cut and recut, then discharged down into the grass. Reduces handling of clippings, improves appearance, and recycles nutrients back to the soil

Catcher Commercial-duty, 8 bushel, rear-mounted, two-bag catcher
Stripe Kit Make your lawn look like Yankee stadium
Personalized Bumper Have your name laser-cut into the rear bumper of your mower. Ask your dealer for details.

Snow Blower 48", two-stage blower utilizes the deck-lift to raise and lower. The blower is powered by deck belt and features a rotating chute adjustable from the seat and a heavy-duty gear box

Snow Blower 56" wide, 3-position angling, heavy-duty, reversible, replaceable cutting edge

Fusion™ Blades High-lift blades with a patented Fusion edges that stay sharp as much as 2 to 3-times longer

Gator™ Blades Patented mulching blade design

Wavy Blades Improved performance for mulching

Jack Kit Mounts to unit and can be carried onboard at all times

Other Accessories Light Kit, Tire Chains, Hour Meter, Steering Lever Extension Kit, Weight/Utility Box

Specifications subject to change without notice.

Engine Model	Kawasaki	Honda	Kohler	Kawasaki	Honda
Horsepower/Deck	19/48	18/48	19/48	21/54	20/54
Tires					
Front:	11 x 4 - 5, rib tread	11 x 4 - 5, rib tread	11 x 4 - 5, rib tread	11 x 4 - 5, rib tread	11 x 4 - 5, rib tread
Drive:	18 x 8.50 - 8, turf tread	18 x 8.50 - 8, turf tread	18 x 8.50 - 8, turf tread	18 x 9.50 - 8, turf tread	18 x 9.50 - 8, turf tread
Mower	48 in side-discharge	48 in side-discharge	48 in side-discharge	54 in side-discharge	54 in side-discharge
Mowing Blades	16.5 in x 2.5 in x .20 in	16.5 in x 2.5 in x .20 in	16.5 in x 2.5 in x .20 in	18.5 in x 2.5 in x .20 in	18.5 in x 2.5 in x .20 in
Blade Tip Speed	18,045 fpm	18,045 fpm	18,045 fpm	18,200 fpm	18,200 fpm
Width of Cut	47.1 in (119.63 cm)	47.1 in (119.63 cm)	47.1 in (119.63 cm)	53.1 in (134.87 cm)	53.1 in (134.87 cm)
Trim Capacity (left side)	2.0 in (5.08 cm)	2.0 in (5.08 cm)	2.0 in (5.08 cm)	4.5 in (11.43 cm)	4.5 in (11.43 cm)
Cutting Height	1.5 in to 4.5 in, .25 in increments (3.81 cm to 11.43 cm, 64 cm)	1.5 in to 4.5 in, .25 in increments (3.81 cm to 11.43 cm, 64 cm)	1.5 in to 4.5 in, .25 in increments (3.81 cm to 11.43 cm, 64 cm)	1.5 in to 4.5 in, .25 in increments (3.81 cm to 11.43 cm, 64 cm)	1.5 in to 4.5 in, .25 in increments (3.81 cm to 11.43 cm, 64 cm)
Dimensions					
Height	39.8 in (101.10 cm)	39.8 in (101.10 cm)	39.8 in (101.10 cm)	39.8 in (101.10 cm)	39.8 in (101.10 cm)
Length	70.92 in (180.14 cm)	70.92 in (180.14 cm)	70.92 in (180.14 cm)	70.92 in (180.14 cm)	70.92 in (180.14 cm)
Overall width	51.77 in (131.50 cm) w/chute up	51.77 in (131.50 cm) w/chute up	51.77 in (131.50 cm) w/chute up	61.30 in (155.70 cm) w/chute up	61.30 in (155.70 cm) w/chute up
Tire-to-tire width	43 in (109.22 cm)	43 in (109.22 cm)	43 in (109.22 cm)	47 in (119.38 cm)	47 in (119.38 cm)
Weight	790 lbs (358.34 kg)	790 lbs (358.34 kg)	790 lbs (358.34 kg)	815 lbs (369.67 kg)	815 lbs (369.67 kg)




For more information online : hustlerturf.com **HUSTLER**
 HUSTLER TURF EQUIPMENT • HESSTON, KANSAS 67062 • 1-800-395-4757



PROFESSIONAL MOWING COMES HOME!™

HUSTLER FASTRAK Z FEATURES

48" and 54" welded side-discharge decks with optional mulching kits and a lifetime warranty on the leading edge.

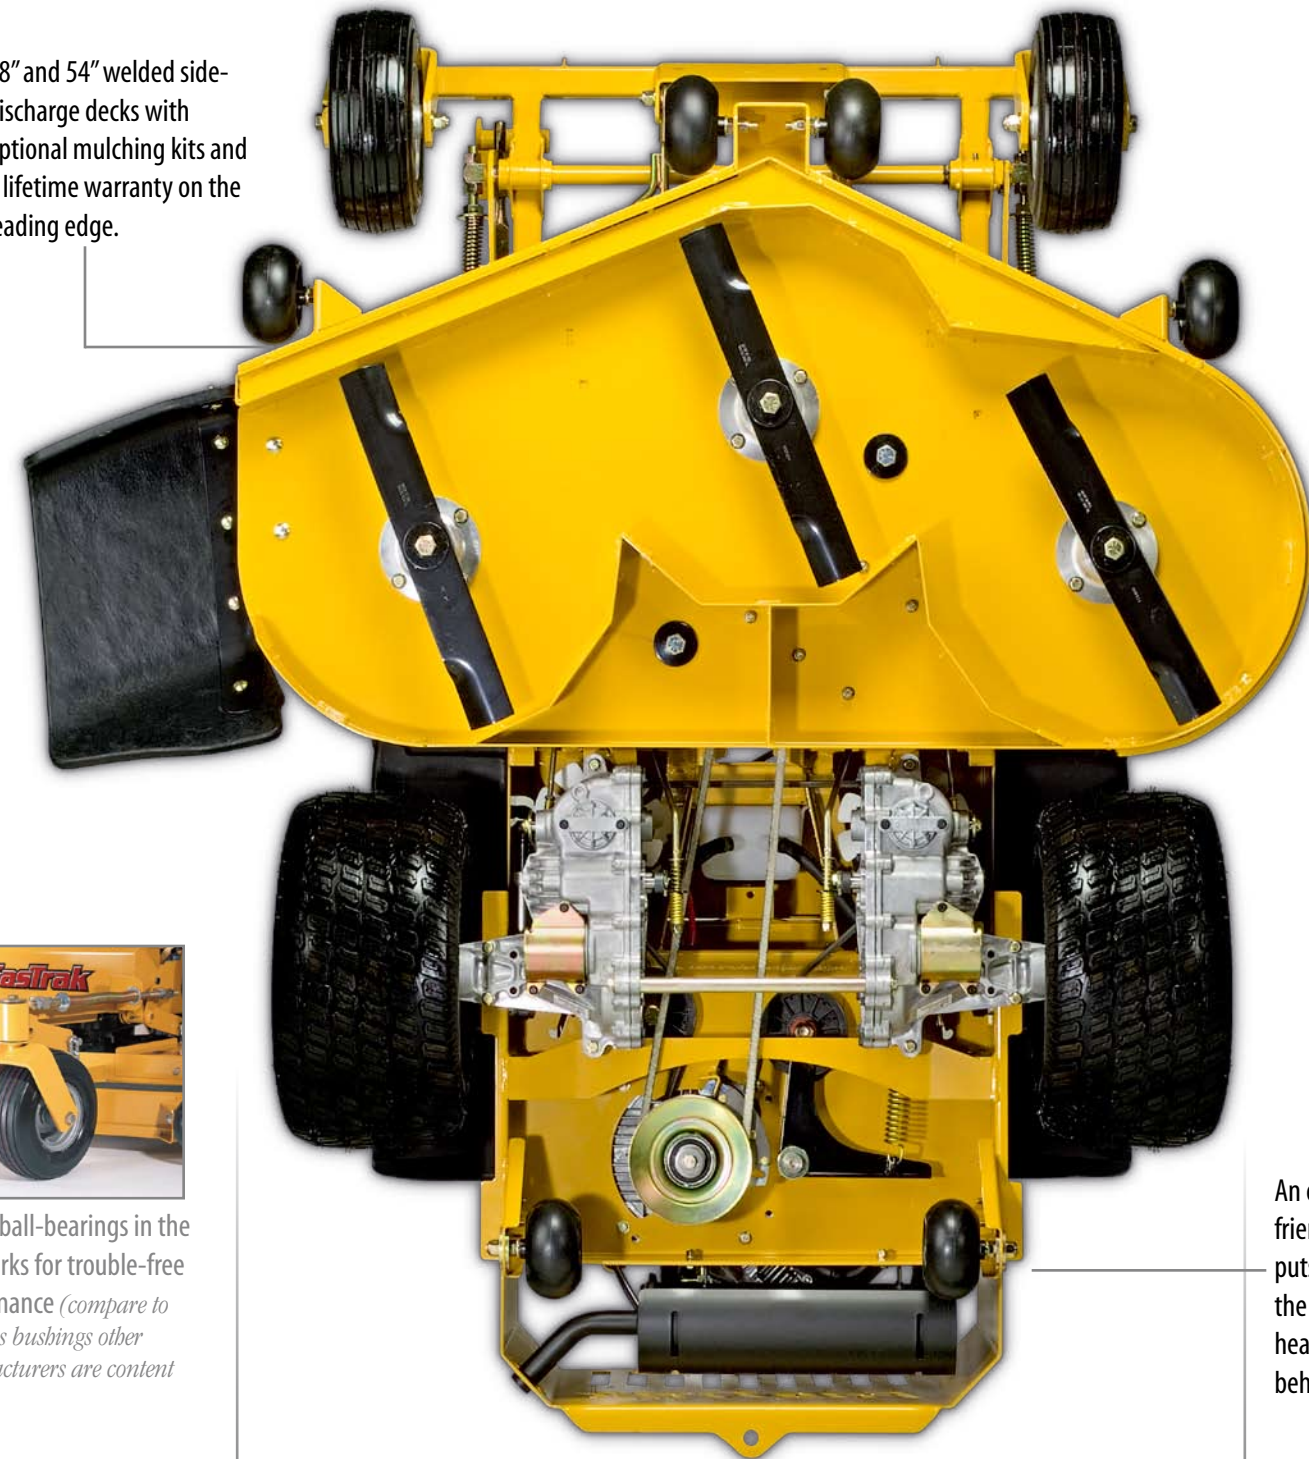

Sealed ball-bearings in the front forks for trouble-free performance (compare to the brass bushings other manufacturers are content to use).

A wide stance and a low center of gravity for unmatched performance on slopes.

An operator-friendly design that puts all the noise of the engine and the heat of its exhaust behind you.



BEST WARRANTY* IN THE BUSINESS

- Four-Year parts and labor warranty
- Lifetime warranty on the tractor frame
- Lifetime warranty on the leading edge of the deck
- 1-year commercial warranty


*See dealer for details on Hustler warranties.

The Fastrak™ is the first residential mower built to commercial standards of performance and durability. In fact, the Fastrak is so tough, it carries a full 1-year commercial warranty!

The Fastrak cries out for head-to-head comparisons, for the kicking of some tires. Examine any aspect of the Fastrak's design or construction; feel the thickness of its steel; look carefully at its powertrain; spend a solid 15 minutes in the operator's seat... do so, and you'll want to take one home with you.

In terms of its conveniences, the Fastrak is operator-friendly in the extreme, comfortable in the way that only mowers meant for all-day, everyday use can be.

- SmoothTrak™ steering for the smoothest, most-nimble controls in its class
- A sturdy, cushioned sliding seat with standard armrests
- 18" drive tires and 11" caster tires for a soft ride
- Adjustable (fore/aft, up/down) steering levers for ideal positioning
- Large, easily reachable cupholders

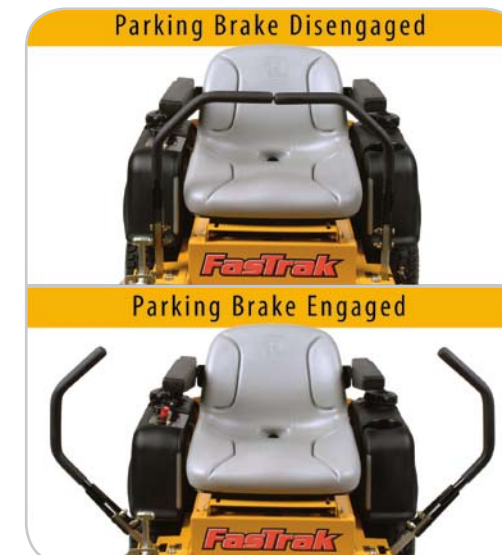

Patented automatic parking brake system is operated by the steering arms.



SmoothTrak™ steering is the result of innovative engineering using commercial-duty Hydro-Gear ZT2800 hydrostatic transmissions.



Easy, foot-operated height adjustment in quarter-inch increments from 1" to 4" - no stress, no strain, no scraped knuckles.

